


TPV 8000 -SERIES

Suitable for a high-pressure closed circuit:

Size (cc/rev):	47	60	75	100	135
Rated pressure (bar):	420	420	420	420	420
Max pressure (bar):	450	450	450	450	450

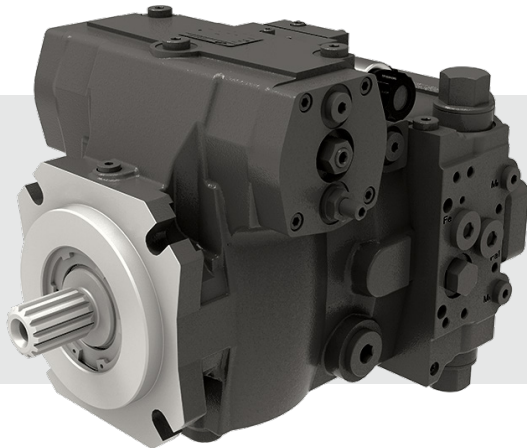

Axial Piston Variable Displacement Pump

TPV8000 series axial piston pump is a high pressure closed circuit pump, which can meet the application requirements of customer for harsh working conditions such as high pressure, high rotational speed and frequent impact.

Features

- ◀ Variable axial piston pump of swashplate design for hydrostatic drives in closed circuit.
- ◀ Flow direction changes smoothly when the swashplate is moved through the neutral position.
- ◀ Two pressure relief valves are installed on the high-pressure side to prevent overload.
- ◀ The built-in charge pump acts as charge pump and control pump.
- ◀ The maximum charge pressure is limited by the builtin low pressure relief valve.
- ◀ New rotary components and bearings, make the transmission efficiency improved, and the input speed increased.
- ◀ Optimized shell design to reduce vibration and noise.
- ◀ Electric proportional displacement control meets the application requirements of multiple industries.
- ◀ Various oil outlet connection methods help to optimize pipeline connection.
- ◀ TPV8000 pump can be optionally equipped with a flush valve, which can be directly installed on the pump body.


Technical Data

Size		47	60	75	100	135
Displacement (cc/rev)		47	60	75.6	100	135
Speed	Rated (rpm)	3300	3600	3300	3000	2850
	Max. (rpm)	3550	3900	3600	3300	3250
	Min. (rpm)	500	500	500	500	500
Pressure	Rated (bar)	420	420	420	420	420
	Max. (bar)	450	450	450	450	450
	Minimum low loop pressure (bar) (Above charge pump)	10	10	10	10	10
Charge pump displacement (cc/rev)		8.6/11.6	11.6	17/21/27		28.3
Charge pressure (relative to Charge pump)	Max. (bar)	35	40	40	40	40
Casting pressure	Rated (bar)	2	2	2	2	2
	Max. (bar)(Short-time peak pressure) Rated (bar)	3.0	5.0	5.0	5.0	5.0
Suction pressure (Absolute pressure)	Oil viscosity $\leq 30\text{mm}^2/\text{s}$	0.8	0.8	0.8	0.8	0.8
	Max. (bar)	5	5	5	5	5
Oil viscosity (mm ² /s)		10~1000, Best range: 16~36				
Oil temperature (°C)		-20~95				
Oil cleanliness		ISO 4406 Class 20/18/15 or higher				
Weight (w/o auxiliary flange)	(Kg)	33	38	58	62	82

Technical Data

Permissible input and through-drive torques						
Size		47	60	75	100	135
Torque at $V_{g \max}$ and $\Delta p = 400$ bar Nm	T	287	382	477	636	859
Maximum input torque at drive shaft (Nm)						
ANSI B92.1b	1 in 15T 16/32DP	$T_{E \max}$	272			
	1 1/4 in 15T 16/32 DP	$T_{E \max}$		319		
	1 1/4 in 14T 12/24 DP	$T_{E \max}$	552	602	630	630
	1 3/8 in 21T 16/32 DP	$T_{D \max}$		970	970	
	1 1/2 in 23T 16/32 DP	$T_{E \max}$			1305	1305
	1 3/4 in 13T 8/16 DP	$T_{E \max}$			1500	1500
	1 3/4 in 27T 16/32 DP	$T_{E \max}$				1830
	2 in 15T 8/16 DP	$T_{E \max}$				2670
DIN 5480	2 1/4 in 17T 8/16 DP	$T_{E \max}$				4070
	W30×2×14×9g	$T_{E \max}$		522		
	W35×2×16×9g	$T_{E \max}$		912		912
	W40×2×18×9g	$T_{E \max}$			1460	1460
Maximum through-drive torque (Nm)		$T_{D \max}$	314	521	660	822
						1110

Torque distribution

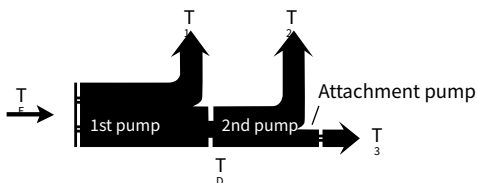

TPV8000	1st pump	T_1
	2nd pump	T_2
Attachment pump		T_3
Input torque		$T_E = T_1 + T_2 + T_3$
		$< T_{E \max}$
Through-drive torque		$T_D = T_2 + T_3$
		$T_D < T_{D \max}$

Type introduction

TPV	E	100	E1	A	D	/	R	N	C8	2	F6	B4	3	F	-	K
①	②	③	④	⑤	⑥		⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭		⑮

Product series

①	Variable piston pump of swashplate in closed circuit	TPV
---	--	-----

Nominal pressure

②	nominal pressure 400/420 bar	E
---	------------------------------	---

Displacement

③	Displacement cc/rev	47	60	75	100	135
---	---------------------	----	----	----	-----	-----

Control mode

④		47	60	75	100	135	Code
	Proportional control (electric U = 12 V DC)	●	●	●	●	●	E1
	Proportional control (electric U = 24 V DC)	●	●	●	●	●	E2
	Proportional control (electric U = 12 V DC), explosion proof electromagnetic coil					●	E5
	Proportional control (electric U = 24 V DC), explosion proof electromagnetic coil					●	E6
	Electrical two-point control (electric U = 24 V DC)	●					E3
	Electrical two-point control (electric U = 24 V DC)	●					E4
	Mechanical servo control	●	●	●	●		H1
	Mechanical servo control, with neutral position switch		●	●	●		H4
	Hydraulic pilot proportional control	●	○	●	●	●	H2
	Hydraulic control direct operated – optimized for hydraulic control	●		●	●		H3

DA control valve

⑤		47	60	75	100	135	Code
	Without swivel DA control valve	●	●	●	●	●	Blank
	Swivel DA control valve	●	●			●	A

Pressure cut-off

⑥	Without pressure cut-off	Blank
	Pressure cut-off	D
	AB port control (Only TPV8000100, TPV8000135)	T

Rotation

⑦	Right hand (clockwise)	R
	Left hand (counter-clockwise)	L

Type introduction

Sealing material

⑧		47	60	75	100	135	Code
	NBR (nitrile rubber)	●	●	●	●	●	N
	Shaft seal in FKM (fluoroelastomer)						
	Cryogenic seal			●	●		W

Mounting flangew and drive shaft

⑨	Mounting flange	Drive shaft	47	60	75	100	135	Code
	SAE B J744-101-2	ANSI B92.1b 1 in 15T 16/32 DP	●					B3
		ANSI B92.1b 1 1/4 in 14T 12/24 DP	●					B4
SAE C J744-127-2		ANSI B92.1b 1 1/4 in 15T 16/32 DP		●				C1
		ANSI B92.1b 1 1/4 in 14T 12/24 DP		●				C2
		ANSI B92.1b 1 3/8 in 21T 16/32 DP		●				C3
		DIN 5480 W30×2×14×9g		○				C4
		DIN 5480 W35×2×16×9g		●				C5
SAE C J744-127-4		ANSI B92.1b 1 1/4 in 14T 12/24 DP			●	●		C6
		ANSI B92.1b 1 3/8 in 21T 16/32 DP			●			C7
		ANSI B92.1b 1 1/2 in 23T 16/32 DP			●	●		C8
		ANSI B92.1b 1 3/4 in 13T 8/16 DP			●	●		C9
		DIN 5480 W35×2×16×9g				●		CA
		DIN 5480 W40×2×18×9g			●			CB
SAE D J744-152-2/4		DIN 5480 W45×2×21×9g					●	CE
		ANSI B92.1b 1 1/2 in 23T 16/32 DP					●	D0
		ANSI B92.1b 1 3/4 in 13T 8/16 DP					●	D1
		ANSI B92.1b 1 3/4 in 27T 16/32 DP					●	D2
		ANSI B92.1b 2 in 15T 8/16 DP					●	D3
		DIN 5480 W40×2×18×9g					●	D4
		DIN 5480 W45×2×21×9g					●	D5

Working port

⑩	Working port	47	60	75	100	135	Code
	Same-side SAE flange port A and B	●	●	●	●	●	1
	Off-side SAE flange port A and B	○	●	●	●		2
	Same-side SAE flange ports A, B and S thread oil port			●			5

Type introduction

Boost pump and rotary group configuration

⑪	Standard rotary group, without boost pump							K
	Standard rotary group, boost pump integrated	Charge pump displacement (cc/rev)	47	60	75	100	135	Code
		8.6	●	●				F0
		11.6	●					F2
		17			●	●		F5
		21			●	●		F6
		27			●	●		F8
		28.3					●	F9

Through drive

⑫	Through drive		47	60	75	100	135	Code
	Without through drive		●	●	●	●	●	Blank
	Flange	Splined shaft						
	SAE A J744-82-2	ANSI B92.1b 5/8 in 9T 16/32 DP	●	●	●	●	●	A1
		ANSI B92.1b 3/4 in 11T 16/32 DP	●	●	●	●		A2
	SAE B J744-101-2	ANSI B92.1b 7/8 in 13T 16/32DP	●	●	●	●	●	B1
		ANSI B92.1b 1 in 15T 16/32 DP	●	●	●	●		B3
		ANSI B92.1b 1 1/4 in 14T 12/24 DP			●	●		B4
	SAE C J744-127-2	ANSI B92.1b 1 1/4 in 14T 12/24 DP			●	●		C2
	SAE C J744-127-4	ANSI B92.1b 1 1/4 in 13T 8/16 DP				●		CF
		ANSI B92.1b 1 1/4 in 14T 12/24 DP			●	●		C6
	SAE C J744-127-2/4	ANSI B92.1b 1 1/4 in 14T 12/24 DP		●	●	●	●	CC
	SAE D J744-152-2/4	DIN 5480 N40×2×18×9g					●	D4

Remark: The "CF" axis is a non-standard customized version. If you need to select, please contact Hansa Tmp .

Relief valve

⑬	Relief valve	Setting range Δp	47	60	75	100	135	Code
	Pilot-operated high-pressure relief valve	100~420bar, with a bypass			●	●	●	1
		250~420bar, without a bypass	●	○	●	●		3
	Direct-acting high-pressure relief valve, fixed setting	250~420bar, with a bypass	●	●				5
		100~250bar, without a bypass	●	○				4
		100~250bar, with a bypass	○	○				6

Remark: TPV800075 and TPV8000 100 when selecting SAE flange ports A and B on the same side, code 1 (pilot-operated high-pressure relief valve) is not optional, and without bypass function.

Type introduction

Filtration boost circuit/external boost pressure supply

⑭	Filtration boost circuit/external boost pressure supply	47	60	75	100	135	Code
	External boost pressure supply (version without integrated boost pump)						Blank
	Filtration in the boost pump suction line	●	●	●	●	●	S
	Filtration in the boost pump pressure line (ports with external filter circuit)	●	●	●	●	●	D
	Filtration in the boost pump pressure line (with filter)		●	●	●	●	F
	Filtration in the boost pump pressure line (with filter, cold start valve, contamination indicator)		●	●	●	●	B

Remark: TPV800075 and TPV8000100 when selecting SAE flange ports A and B on the same side, no cold start, with side oil channel.


Standard / special version

⑮	Standard / Special version		47	60	75	100	135	Code
	Standard version		●	●	●	●	●	Blank
	Special version	Emergency return valve (Brake unloading valve)	●	●	●	●		F
		With flush valve (Opening pressure 16bar, differential pressure ΔP=25bar)	Flushing flow (L/min)					
			47	60	75	100	135	Code
			10	●	●	●	●	2
			12		●			6
			15			●	●	3
			20			●	●	4
			25			●	●	5

Remark: ● = Available; ○ = On request

Hydraulic fluid

Selection diagram

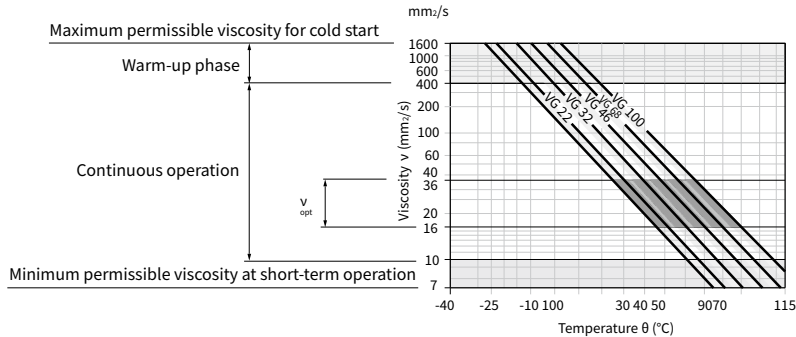

Notes on selection of hydraulic fluid:

The hydraulic fluid should be selected such that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} see selection diagram).

Notice:

At no point of the component may the temperature be higher than 115 ° C. The temperature difference specified in the table is to be taken into account when determining the viscosity in the bearing. Please contact us if the above conditions cannot be met due to extreme operating parameters.

Hydraulic fluid

·Viscosity and temperature of hydraulic fluids

	Viscosity (mm ² /s)	Shaft seal	Temperature	Comment
Cold start	v _{max} ≤ 7400 (1600)	NBR	θ _{St} ≥ -40 °C	t ≤ 3min, without load (p ≤ 725psi(50bar), n ≤ 1000rpm Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 45 °F (25 K).
		FKM	St ≥ -25 °C	
Warm-up phase	v = 7400 ... 1850 (1600 ... 400)			t ≤ 15min, p ≤ 0.7×p _{nom} and n ≤ 0.5×n _{nom}
Continuous operation	v = 1850 ... 60 (400 ... 10)	NBR	θ ≤ +85 °C	measured at port T
		FKM	+110 °C	
	v _{opt} = 170 ... 82 (36 ... 16)			Range of optimum operating viscosity and efficiency
Short-term operation	v _{min} = 60 ... 49 (10 ... 7)	NBR	θ ≤ +85 °C	t ≤ 3min, p ≤ 0.3×p _{nom} , measured at port T
		FKM	+110 °C	

·Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit.

A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.

At a hydraulic fluid viscosity of less than 10 mm²/s (e.g. due to high temperatures during short-term operation) at the drain port, a cleanliness level of at least 19/17/14 according to ISO 4406 is required.

·Shaft seal


Notice

· Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.

·In addition to the hydraulic fluid and the temperature, the service life of the shaft seal is influenced by the rotational speed of the axial piston unit and the case pressure.

·The service life of the shaft seal decreases with increasing frequency of pressure peaks and increasing mean differential pressure.

·The case pressure must be greater than the ambient pressure.

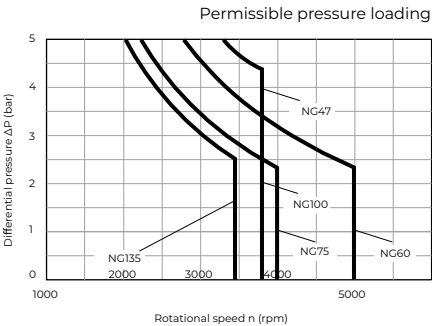

E - Electrical displacement control


·Electrical displacement control principle

The output flow of the pump is infinitely variable between 0 and 100%, proportional to the electrical current supplied to solenoid a or b.

The electrical energy is converted into a force acting on the control spool.

This control spool then directs control oil into and out of the stroking cylinder to adjust pump displacement as required.

A feedback lever connected to the stroking piston maintains the pump flow for any given current within the control range.

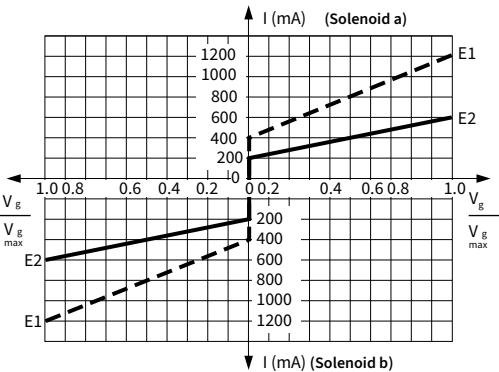

Standard:

Proportional solenoid without manual emergency operation.

Supply as required:

Proportional solenoid with manual emergency operation and spring return.

Technical data, solenoid


Control		E1	E2
Voltage		12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Control current	Start of control at $V_g=0$	400 mA	200 mA
	End of control at $V_{g\max}$	1200 mA	600 mA
Current limit		1540 mA	840 mA
Nominal resistance (at 68 °F (20°C)		5.5 Ω	21.7 Ω
Dither frequency		100Hz / 120Hz (120Hz only for the TPV8000175 closed pumps)	
Duty cycle		100%	
Type of protection		See connector version	

Note: The spring-return device in the control module is not a safety device


The control module may be stuck in an uncertain position by internal impurities (hydraulic oil impurities, system component wear or sediment). As a result, the controller can no longer respond correctly to the instruction from the operator.

Check whether additional safety measures are required on your machine to move the drive actuator to a controlled safe position (emergency stop). When necessary, please ensure that these operations are implemented correctly.

TPV8000 47 Control principle

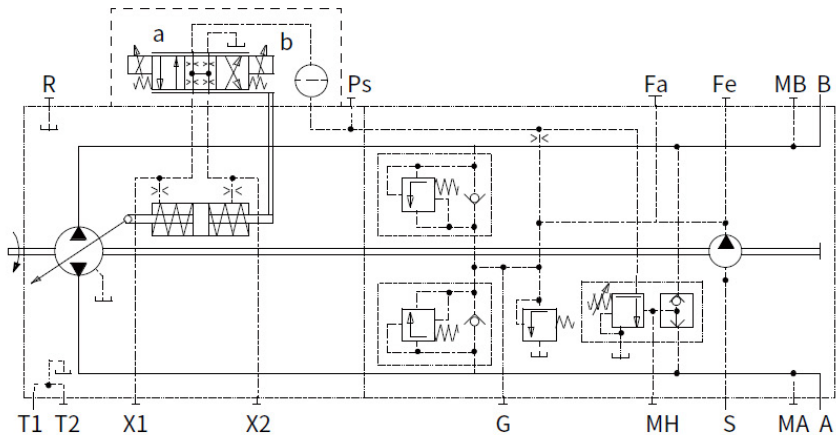


Direction of rotation	Clockwise		Counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X1	X2	X1	X2
Flow direction	A to B	B to A	B to A	A to B
Working pressure	MB	MA	MA	MB

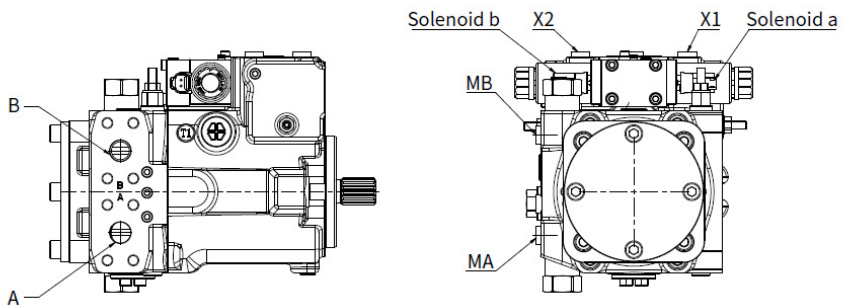

Installation size

TPV8000 47 Installation size

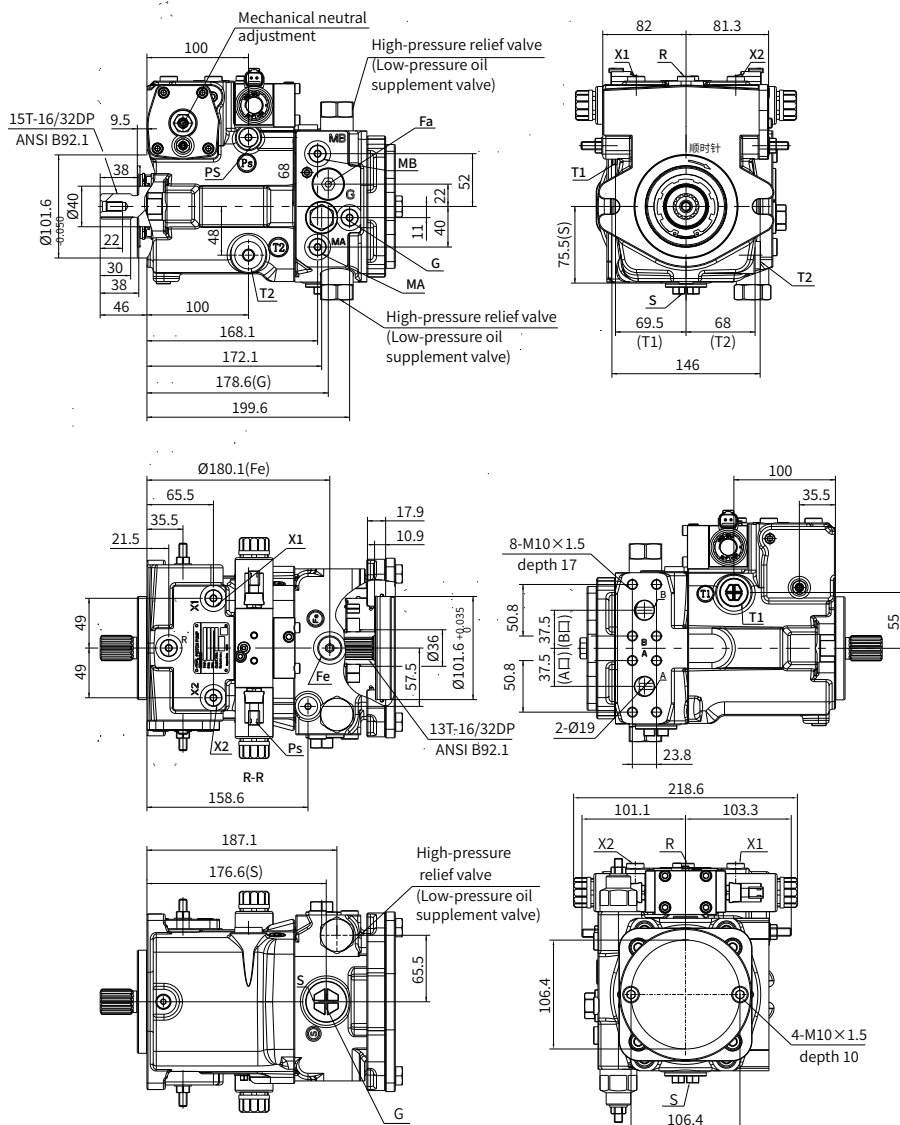


Installation size

.TPV8000 47 Port details


Port	Port Name	Standard	Oil Port Specification (thread depth)	Maximum pressure (bar)
A, B	Working port	SAE J518	3/4"	450
	Fastening thread	DIN 13	M10 (depth17)	-
S	Suction port	DIN 3852	M33×2 (depth18)	5
T1, T2	Drain port	DIN 3852	M22×1.5 (depth14)	3
R	Air bleed port	DIN 3852	M12×1.5 (depth12)	3
X1, X2	Control pressure port	DIN 3852	M12×1.5 (depth12)	30
P _s	Pilot pressure port inlet	DIN 3852	M14×1.5 (depth12)	30
MA, MB	Measuring port pressure A, B	DIN 3852	M12×1.5 (depth12)	450
Fa	Boost pressure port inlet	DIN 3852	M18×1.5 (depth12)	40
Fe	Charge pressure outlet	DIN 3852	M18×1.5 (depth12)	40
G	Measuring port of slippage pump pressure	DIN 3852	M12×1.5 (depth12)	40
MH	Measuring port of high pressure	DIN 3852	M12×1.5 (depth12)	450

Installation size

TPV8000 47 Shaft extension type




"B3" type spline shaft
ANSI B92.1b
1 in 15T 16/32DP

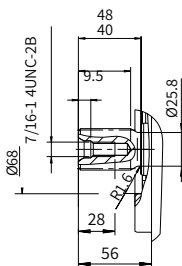


"B4" type spline shaft
ANSI B92.1b
1 1/4 in 14T 12/24DP


TPV8000 47 Through shaft drive

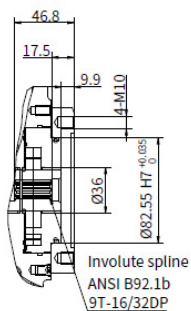


"A1" type
through drive

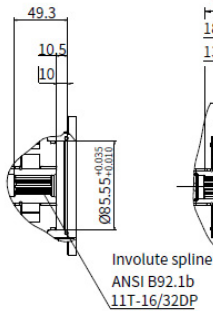

"A2" type
through drive

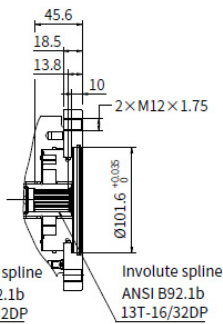


"B1" type
through drive




"B3" type
through drive

TPV8000 60 Control principle

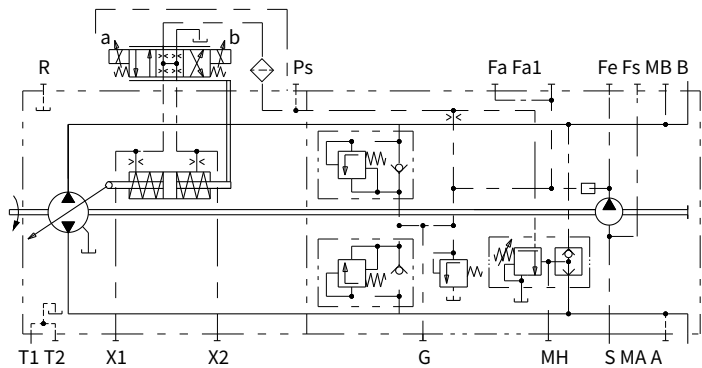


Direction of rotation	Clockwise		Counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X1	X2	X1	X2
Flow direction	A to B	B to A	B to A	A to B
Working pressure	MB	MA	MA	MB

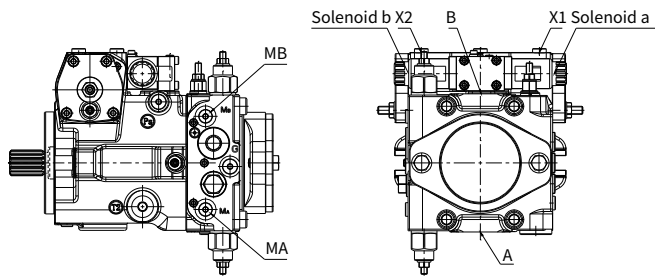

Installation size

TPV8000 60 Installation size

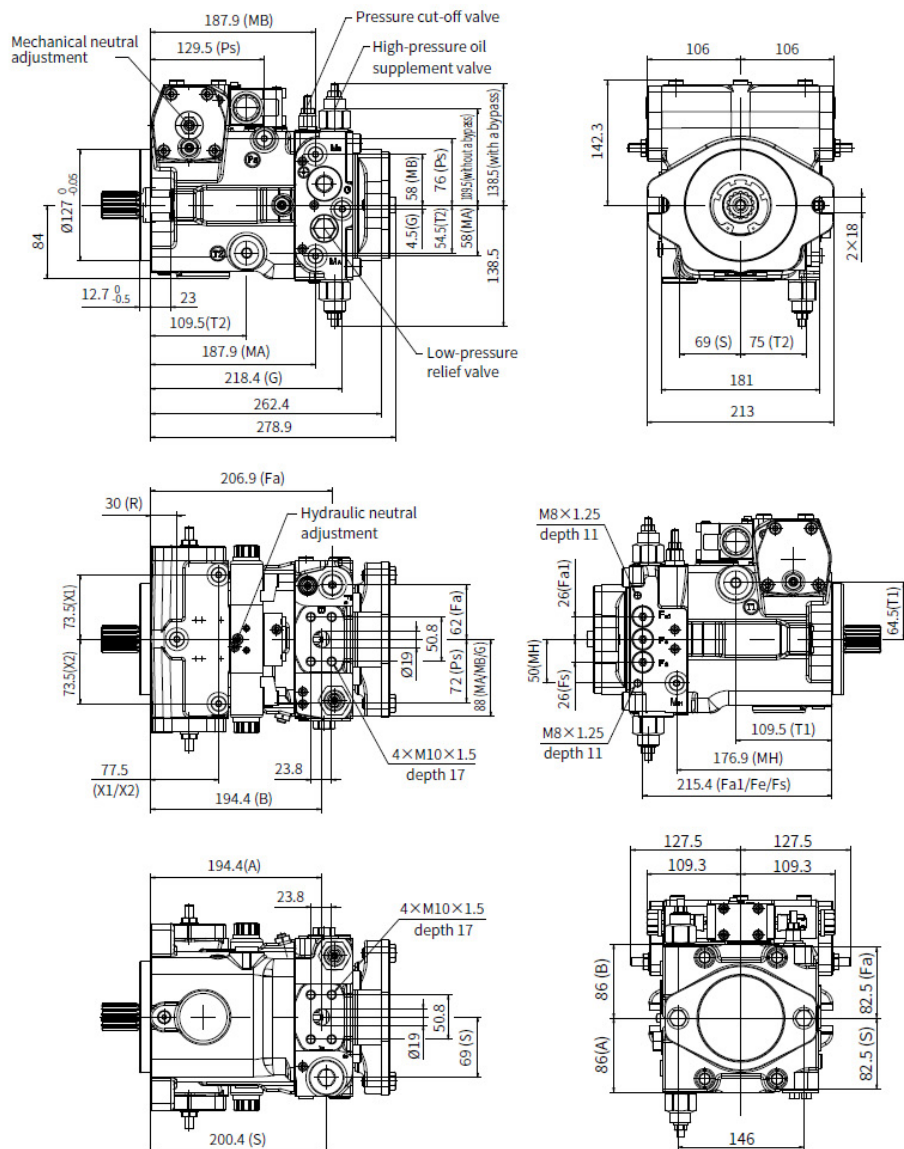


Installation size

TPV8000 60 Port details


Port	Port Name	Standard	Oil Port Specification (thread depth)	Maximum pressure (bar)
A, B	Working port	SAE J518	3/4"	450
	Fastening thread	DIN 13	M10×1.5 (depth 17mm)	-
S	Suction port	ISO 9974-1	M33×2 (depth 18mm)	3
T1, T2	Drain port	ISO 9974-1	M22×1.5 (depth 14mm)	3
R	Air bleed port	ISO 9974-1	M12×1.5 (depth 12mm)	3
X1, X2	Control pressure port	ISO 9974-1	M12×1.5 (depth 12mm)	40
G	Boost pressure port	ISO 9974-1	M14×1.5 (depth 12mm)	40
P _s	Pilot pressure port inlet	ISO 9974-1	M14×1.5 (depth 12mm)	40
MA, MB	Measuring port pressure A, B	ISO 9974-1	M12×1.5 (depth 12mm)	450
MH	Measuring port, high pressure	ISO 9974-1	M12×1.5 (depth 12mm)	450
Fa	Boost pressure port inlet	ISO 9974-1	M18×1.5 (depth 12mm)	40
FaI	Boost pressure port inlet(Filter can be installed)	ISO 9974-1	M18×1.5 (depth 12mm)	40
Fe	Charge pressure outlet	ISO 9974-1	M18×1.5 (depth 12mm)	40
Fs	From the filter to the oil suction line (at cold start)	ISO 9974-1	M18×1.5 (depth 12mm)	40

Installation size


·TPV8000 60 Shaft extension type




"C1" type spline shaft
ANSI B92.1b 1 1/4 in 15T
16/32DP



"C2" type spline shaft
ANSI B92.1b 1 1/4 in 14T
12/24DP




"C3" type spline shaft
ANSI B92.1b 1 3/8 in 21T
16/32DP

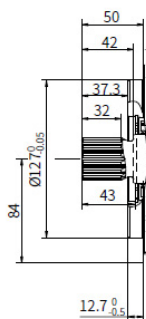


"C5" type spline shaft
DIN 5480
W35×2×16×9g

Installation size


·TPV8000 60 Through shaft drive




"A1" type
through drive




"A2" type
through drive



"B1" type
through drive




"B3" type
through drive




"CC" type
through drive

TPV8000 75 Control principle

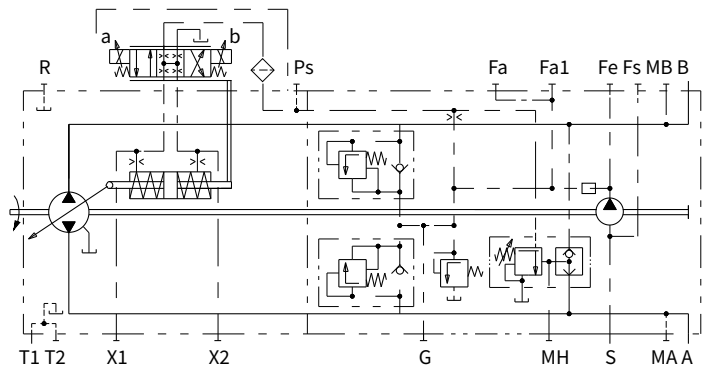


Direction of rotation	Clockwise		Counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X1	X2	X1	X2
Flow direction	B to A	A to B	A to B	B to A
Working pressure	MA	MB	MB	MA

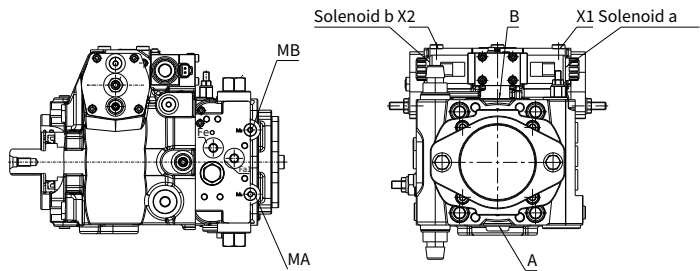

Installation size

TPV8000 75 Installation size

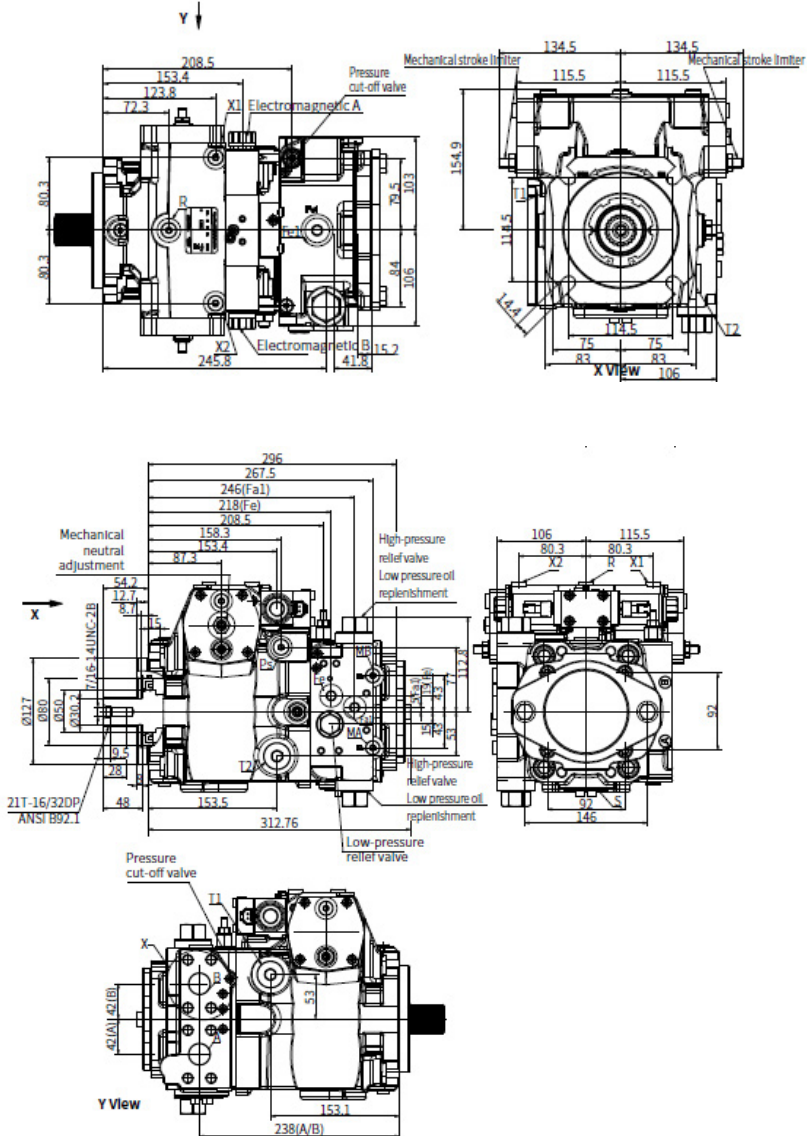


Installation size

TPV8000 75 Port details


Port	Port Name	Standard	Oil Port Specification (thread depth)	Maximum pressure (bar)
A, B	Working port	SAE J518	1"	450
	Fastening thread	DIN 13	M12×1.75 (depth 17)	-
S	Suction port	DIN 3852	M42×2 (depth 20)	3
T1, T2	Drain port	DIN 3852	M26×1.5 (depth 16)	3
R	Air bleed port	DIN 3852	M12×1.5 (depth 12)	3
X1, X2	Control pressure port	DIN 3852	M12×1.5 (depth 12)	40
G	Boost pressure port	DIN 3852	M18×1.5 (depth 12)	40
P _s	Pilot pressure port inlet	DIN 3852	M14×1.5 (depth 12)	40
MA, MB	Measuring port pressure A, B	DIN 3852	M12×1.5 (depth 12)	450
MH	Measuring port, high pressure	DIN 3852	M12×1.5 (depth 12)	450
Fa	Boost pressure port inlet	DIN 3852	M26×1.5 (depth 16)	40
Fal	Boost pressure port inlet (Filter can be installed)	DIN 3852	M22×1.5 (depth 14)	40
Fe	Charge pressure outlet	DIN 3852	M22×1.5 (depth 14)	40
Fs	From the filter to the oil suction line (at cold start)	DIN 3852	M22×1.5 (depth 14)	40

Installation size


TPV8000 75 Shaft extension type




"C6" type spline shaft
ANSI B92.1b 1 1/4 in 14T
12/24DP




"C7" type spline shaft
ANSI B92.1b 1 3/8 in 21T
16/32DP



"C8" type spline shaft
ANSI B92.1b
1 1/2 in 23T 16/32DP




"C9" type spline shaft
ANSI B92.1b
1 3/4 in 13T 8/16DP




"CB" type spline shaft
DIN 5480
W40×2×18×9 g

Installation size


TPV8000 75 Through shaft drive

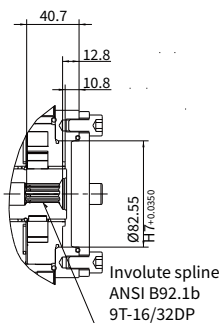


"A1" type
through drive




"A2" type
through drive




"B1" type
through drive

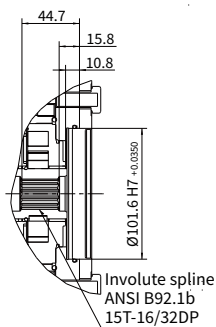


"B3" type
through drive




"B4" type
through drive



"C2" type
through drive

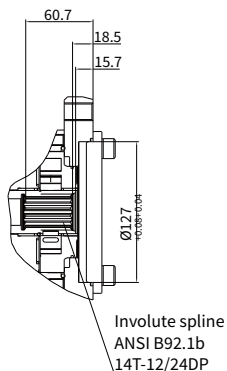


"C6" type
through drive

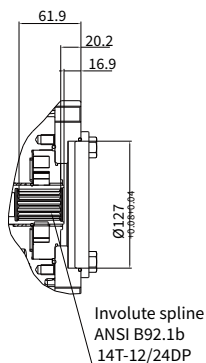


"CC" type
through drive

TPV8000 100 Control principle


.TPV8000 100 Port details

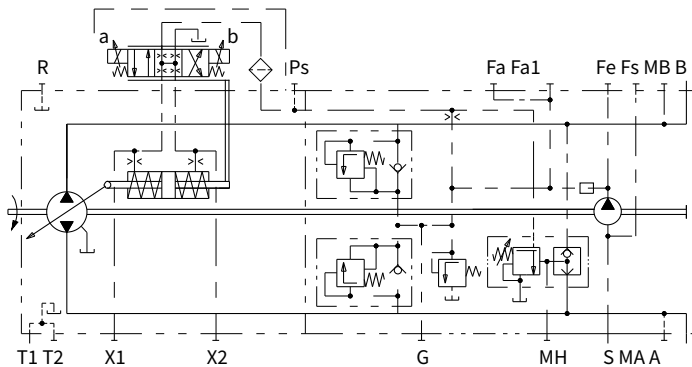

Direction of rotation	Clockwise		Counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X1	X2	X1	X2
Flow direction	B to A	A to B	A to B	B to A
Working pressure	MA	MB	MB	MA

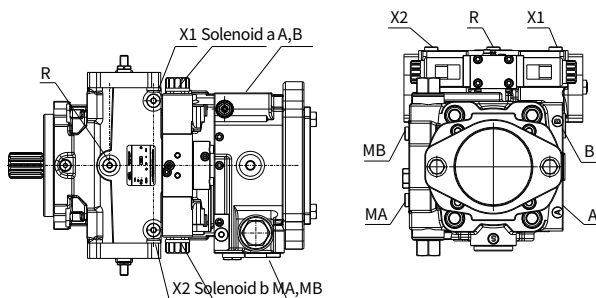

TPV8000 100 Installation size

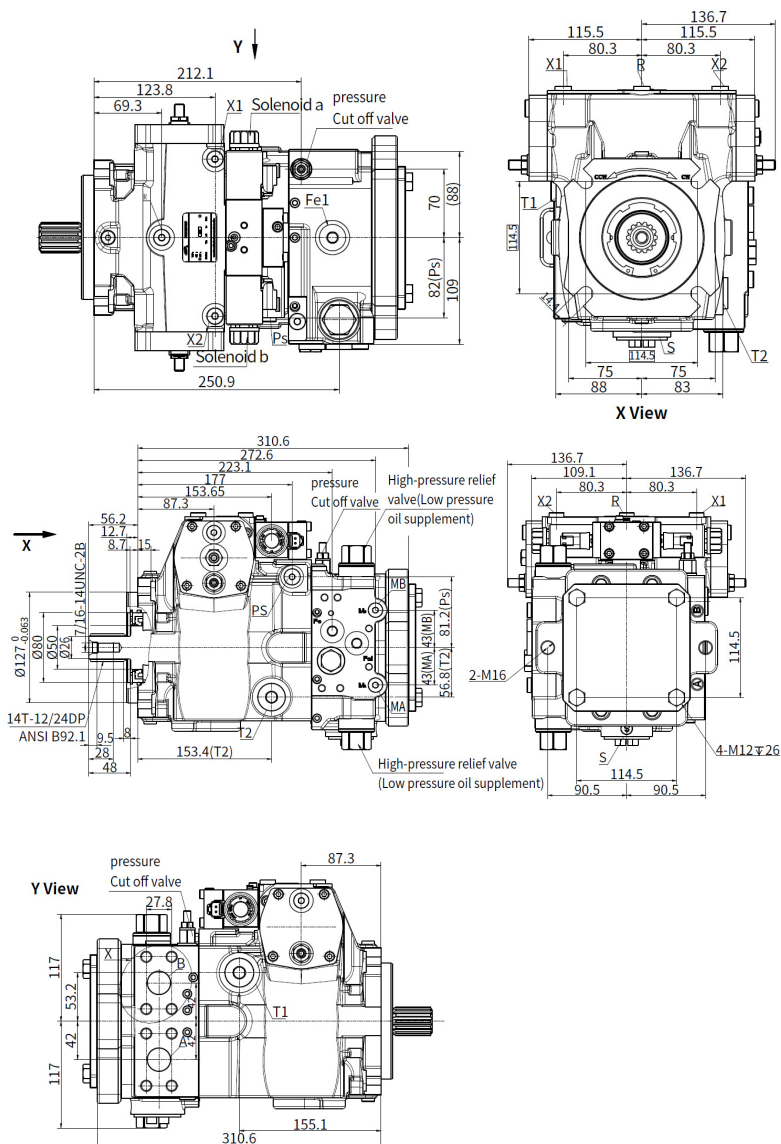


Installation size

TPV8000 100 Port details


Port	Port Name	Standard	Oil Port Specification (thread depth))	Maximum pressure (bar)
A, B	Working port	SAE J518	1"	450
	Fastening thread	DIN 13	M12×1.75 (depth 17mm)	-
S	Suction port	DIN 3852	M42×2 (depth 20mm)	3
T1, T2	Drain port	DIN 3852	M26×1.5 (depth 16mm)	3
R	Air bleed port	DIN 3852	M12×1.5 (depth 12mm)	3
X1, X2	Control pressure port	DIN 3852	M12×1.5 (depth 12mm)	40
P _s	Pilot pressure port inlet	DIN 3852	M14×1.5 (depth 12mm)	40
MA, MB	Measuring port pressure A, B	DIN 3852	M12×1.5 (depth 12mm)	450
Fa	Boost pressure port inlet	DIN 3852	M22×1.5 (depth 14mm)	40
FaI	Boost pressure port inlet (Filter can be installed)	DIN 3852	M22×1.5 (depth 14mm)	40
Fe	Charge pressure outlet	DIN 3852	M22×1.5 (depth 14mm)	40
Fs	From the filter to the oil suction line (at cold start)	DIN 3852	M22×1.5 (depth 14mm)	40

Installation size


TPV8000 100 Shaft extension type




"C6" type spline shaft
ANSI B92.1b
1 1/4 in 14T-12/24DP



"C8" type spline shaft
ANSI B92.1b
1 1/2 in 23T-16/32DP




"C9" type spline shaft
ANSI B92.1b
1 3/4 in 13T-8/16DP

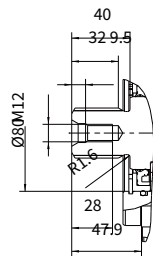


"CA" type spline shaft
DIN 5480
W35×2×16×9 g

Installation size


TPV8000 100 Through shaft drive

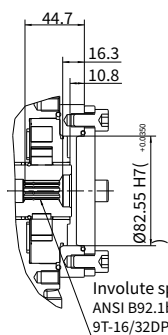


"A1" type
through drive




"A2" type
through drive




"B1" type
through drive




"B3" type
through drive




"B4" type
through drive




"C2" type
through drive

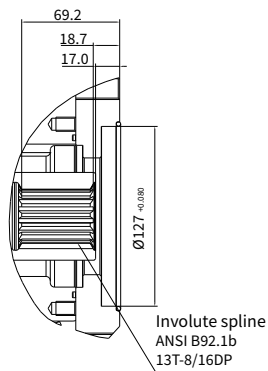

"CF" type
through drive

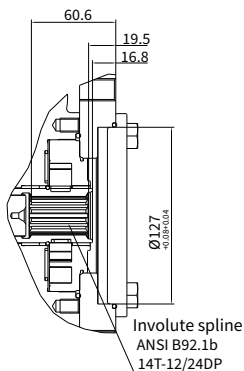


"C6" type
through drive

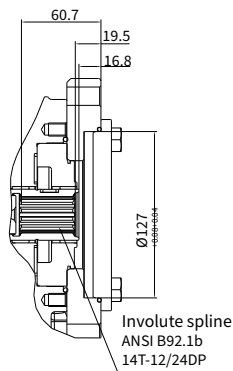


"CC" type
through drive

TPV8000 135 Control principle

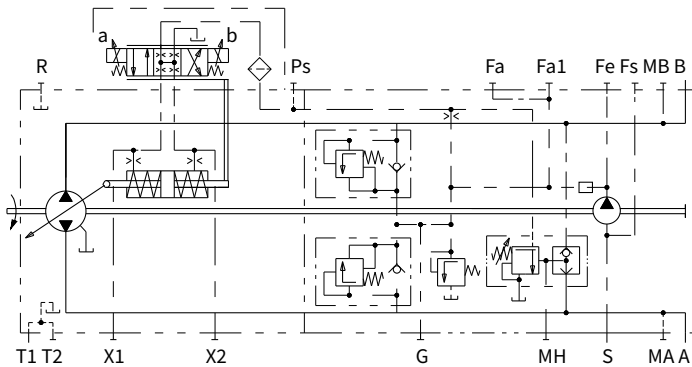

Direction of rotation	Clockwise		Counter-clockwise	
Actuation of proportional solenoid	a	b	a	b
Control pressure	X1	X2	X1	X2
Flow direction	B to A	A to B	A to B	B to A
Working pressure	MA	MB	MB	MA

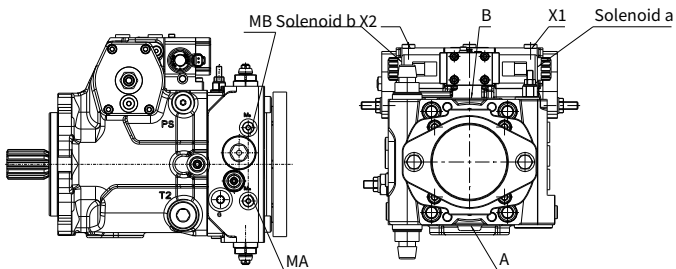


Installation size

TPV8000 135 Port details


Port	Port Name	Standard	Oil Port Specification (thread depth)	Maximum pressure (bar)
A, B	Working port	SAE J518	1 1/4"	450
	Fastening thread	DIN 13	M14×2 (depth 19)	-
S	Suction port	DIN 3852	M48×2 (depth 22)	3
T1, T2	Drain port	DIN 3852	M33×2 (depth 18)	3
R	Air bleed port	DIN 3852	M16×1.5 (depth 12)	3
X1, X2	Control pressure port	DIN 3852	M16×1.5 (depth 12)	40
G	Boost pressure port	DIN 3852	M22×1.5 (depth 14)	40
P _s	Pilot pressure port inlet	DIN 3852	M18×1.5 (depth 12)	40
MA, MB	Measuring port pressure A, B	DIN 3852	M12×1.5 (depth 12)	450
MH	Measuring port, high pressure	DIN 3852	M12×1.5 (depth 12)	450
Fa	Boost pressure port inlet	DIN 3852	M33×2 (depth 18)	40
Fal	Boost pressure port inlet (Filter can be installed)	DIN 3852	M33×2 (depth 18)	40
Fe	Charge pressure outlet	DIN 3852	M33×2 (depth 18)	40
Fs	From the filter to the oil suction line (at cold start)	DIN 3852	M33×2 (depth 18)	40

Installation size


TPV8000 135 Through shaft drive

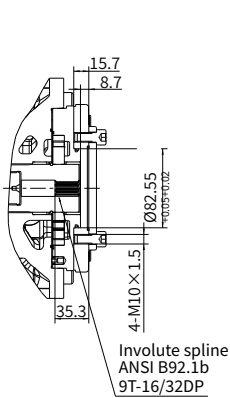


"A1" type
through drive

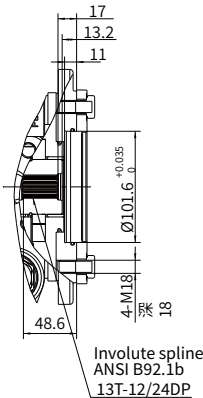

"B1" type
through drive

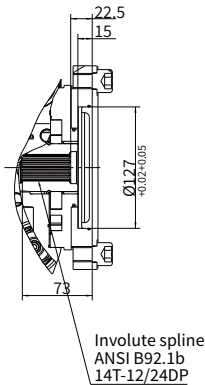

"CC" type
through drive

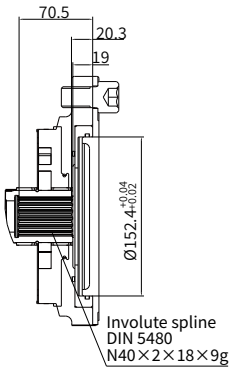

"D4" type
through drive



HANSA-TMP

YOUR PARTNER IN HYDRAULICS!



www.hansatmp.com

ITALY - Hansa-Tmp Headquarters

Via M. L. King, 6 41122 Modena
+39 059 415711
hansatmp@hansatmp.it

GERMANY - Sales Office

Dünner Strasse 247-249, 41066
Mönchengladbach
+49 1621392182
michael.wolf@hansatmp.de

CHINA - Sales Office

Room 8921, Building 18, No. 5555, Shenzhuan
Road, Songjiang
District, Shanghai Zip 201601 Shanghai P.R.C.
+86 21 60709280
weiqijin@hansa-tmp.cn

ITALY - Warehouse & Logistics

Via Don Milani 10 41122 Modena
+39 059 415711
hansatmp@hansatmp.it

INDIA - Sales Office

Koncord, Unit No. 302, 3rd Floor, Bund
Garden Road, Pune,
Maharashtra – 411001
+91 98608 01443
vallabh.joshi@hansatmp.in

Certified Company
ISO 9001:2015 – ISO 14001:2015

